


■ DATASHEET:
SWITCH-DISCONNECTOR FOR D02 FUSES, SERIES ARROW S, 3-POLE

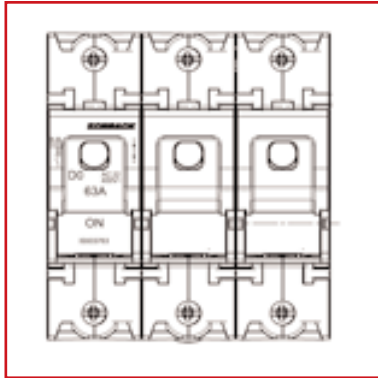


■ SCHRACK-INFO

- Dual-function terminal
- Feeding possible from eighter direction
- Captive fuse carrier
- Lead-sealable

■ TECHNICAL DATA

For fuse links	to IEC / EN 60269-2-1(III)
With permitted power dissipation	max. 5,5 W (gG/gL)
Standards:	IEC 60947-1:2007 IEC 60947-3:1999 + A1:2001 + A2:2005 EN 60947-1:2007 EN 60947-3:1999 + A1:2001 + A2:2005
ELECTRICAL DATAS:	
Rated current:	63A
Rated voltage:	400V-AC
Rated frequency:	50-60Hz
Utilisation category:	AC-22B (400V) according to IEC 60947-3
Power dissipation:	The power dissipation of the device results in 4,5 W at a typical load with 80 % of the nominal current. (The power dissipation is 7 W for application at nominal current.)
Conditional rated short circuit current:	50kA
MECHANICAL DATAS:	
Terminal:	dual-function box-terminal 1.5 - 35mm ² for simultaneous connection of 2 wires (35mm ² + 16mm ²) or comb-type busbar + wire flexible cables, directly or with wire-end ferrule
Torque:	2,5 - 3Nm
Connecting screws:	+/- (PZ2), galvanized, chromized
MATERIAL CHARACTERISTICS:	
Body:	temperature stability 140°C, self-extinguishing in acc. to UL 94, creepage resistance CTI 200
Handle:	temperature stability 140°C, self-extinguishing in acc. to UL 94, creepage resistance CTI 200
Fuse carrier:	temperature stability 150°C, self-extinguishing in acc. to UL 94
Shock protected:	to specification BGV A3
Mounting:	clip-on mounting for DIN-rail
Width x Height x Depth:	81 x 90 x 70mm
Weight:	420g

■ DIMENSIONS

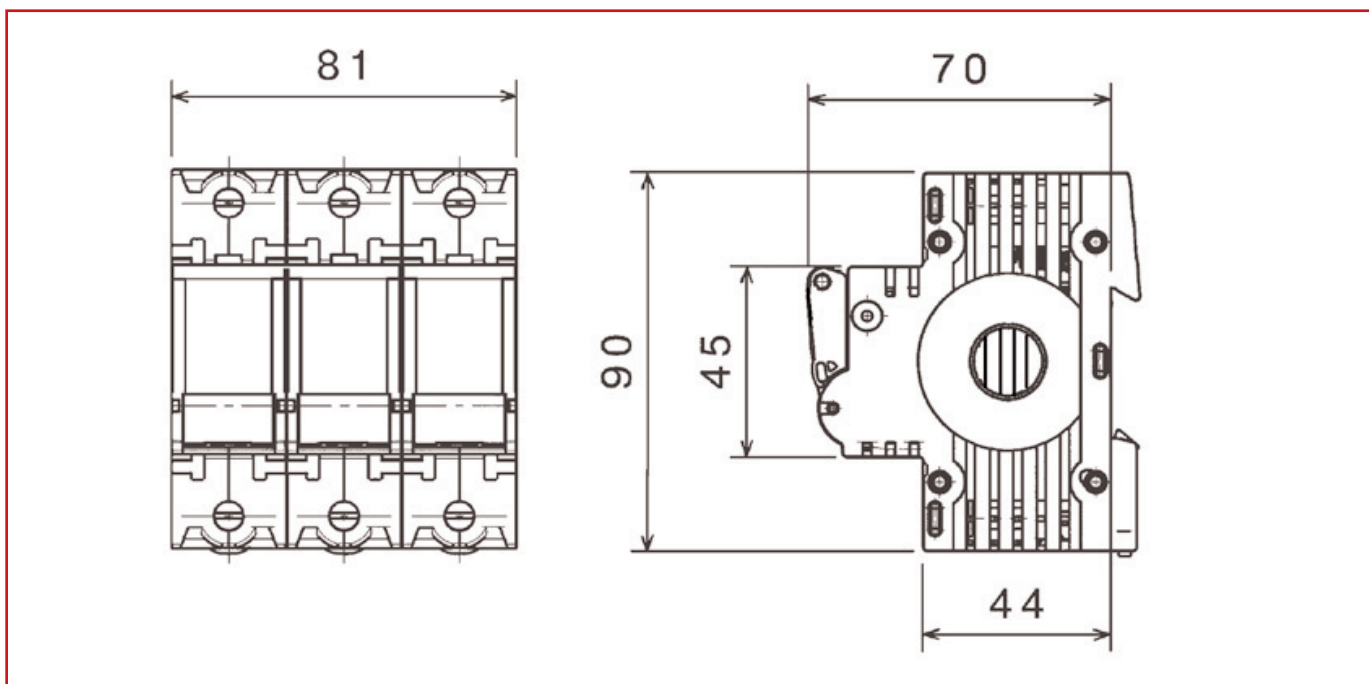

DESCRIPTION	ORDER NO.
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 6A	IS503706
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 10A	IS503710
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 16A	IS503716
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 20A	IS503720
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 25A	IS503725
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 35A	IS503735
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 50A	IS503750
Switch-disconnector for D02 fuses, series ARROW S, 3-pole, 63A	IS503763